

CV6 Switch joystick

Name regulation:

S CV 6—Y Q- 0 4 R2 G — B M —R 0000
 1 2 3 4 5 6 7 8 9 10 11 12 13

1.S: Special for the Mechanical specification

2.CV: Switch joystick with low price

3.6 is the size of the button, the unit is CM

4. Mechanical Type:

X: 1-axis adjustment

Y: 2-axis adjustment

5.Direction of the joystick

X: just can be “ + ” direction on X and Y axis

Q:360 degree square operation.

I: just can be “I” operation on Y axis

4……4 Switches

5……5 Switches

8. Spring Return Installment

R1: 1-axis with spring return (X axis or Y axis)

R2: 2-axis with spring return(X axis and Y axis)

9. Components

G: within the dust-proof rubber cover

10.Handle with button switch, the color can be choose

B:Black


Y:Yellow

G:Green

R:Red

O:Orange

U:Blue

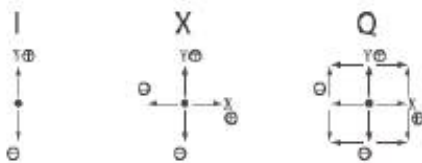

6.Potentiometer quantity

0……without the potentiometer

7.Switch quantity

2……2 switches


11.The type of the button switch

M: triggering type L: converted type

12.The handle can be within the lamp and color can be choose

W:white Y:yellow R:red O:orange G:green U:blue

13.For clients' special requirement.

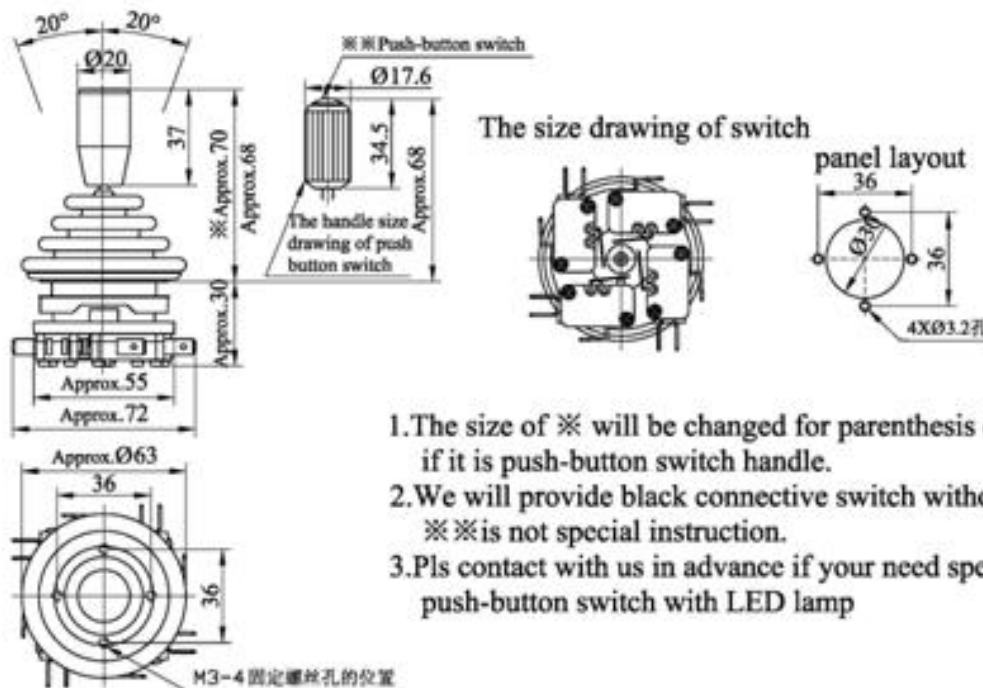

- 1.The size of ※ will be changed for parenthesis data if it is push-button switch handle.
- 2.We will provide black connective switch without lamp if ※ is not special instruction.
- 3.Pls contact with us in advance if your need special color or push-button switch with LED lamp